





11.5电机安装支架:

11.5 Motor bracket:



P.K.,P.L.立式安装带输入电机安装架(敬请垂询)

Motor bracket for P.K., P.L.. vertical mounting(please consult)

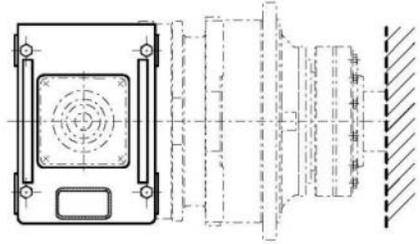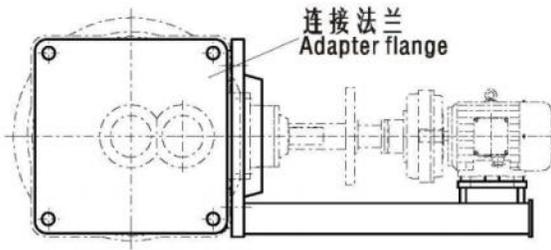



P.K.,P.L.水平安装时的电机机架(敬请垂询)

Motor bracket for P.K., P.L.. horizontal mounting(please consult)

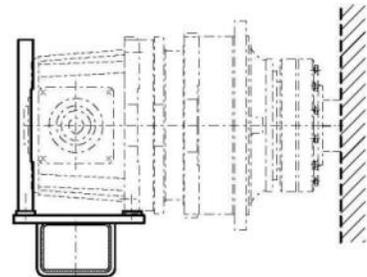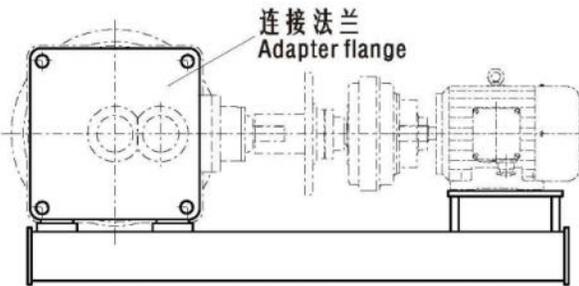

卧式电机安装支架(敬请垂询)

Brackets for horizontal motor(please consult)

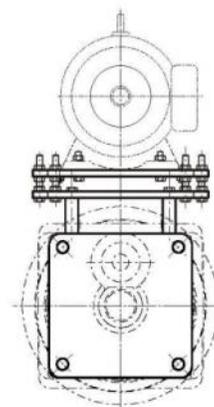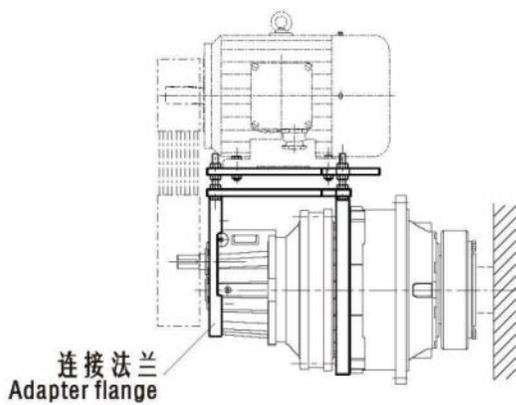




11.6 预紧扭矩:

11.6 Tightening torques:


法兰联接及底座安装时螺母的预紧扭矩。  
Tightening torques for flange connections and foot-mounted design.

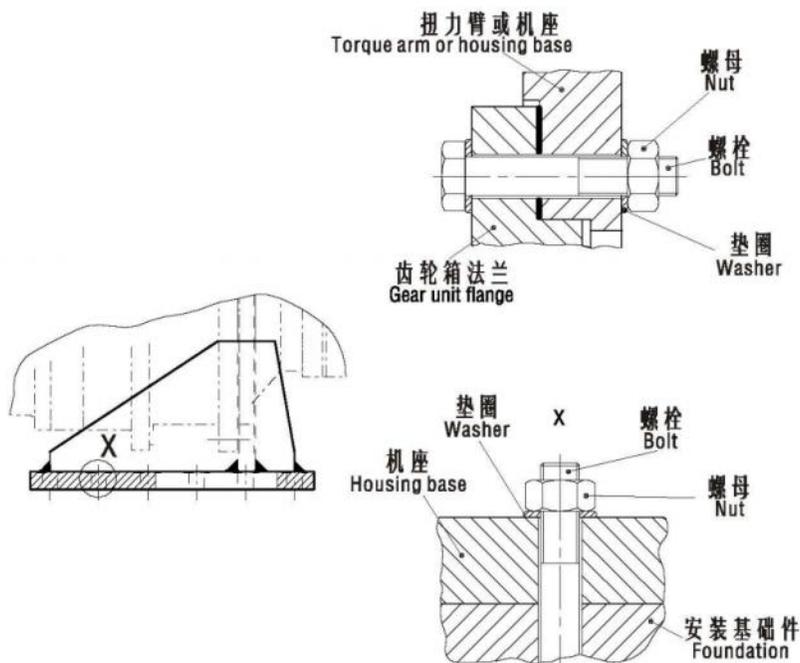

规格 Size	法 兰 Flange		底 座 Base	
	螺栓 Bolt (10.9)	预紧扭矩 Tightening torque (N · m)	螺栓 Bolt (8.8)	预紧扭矩 Tightening torque (N · m)
09	M 16	295	M 24	710
10	M 16	295	M 24	710
11	M 20	580	M 24	710
12	M 24	1000	M 24	710
13	M 24	1000	M 24	710
14	M 24	1000	M 30	1450
16	M 24	1000	M 30	1450
17	M 30	2000	M 36	2530
18	M 30	2000	M 36	2530
19/20	M 30	2000	M 42	4070
21/22	M 36	3560	M 48	6140
23/24	M 36	3560	M 48	6140
25/26	M 42	5720	M 56	9840
27/28	M 48	8640	M 56	9840
29/30	M 48	8640	M 64	14300
31/32	M 56	13850	M 64	14300
33/34	M 56	13850	M 64	14300
35/36	M 56	13850	M 72X6	20800

11.7 逆止器 (附件代号 B11):

11.7 Backstop(Code:B11):

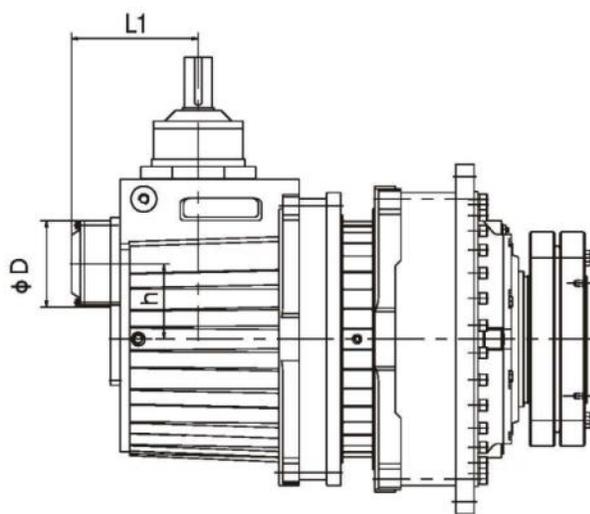

型号Size	L	D	h
P2K09	185	125	90
P2K10	185	125	90
P2K11	205	150	115
P2K12	205	150	115
P2K13	265	175	140
P2K14	265	175	140
P2K16	290	190	170
P2K17	290	190	170
P2K18	345	230	200
P2K19	345	230	200
P2K20	345	230	200
P3K09	185	125	90
P3K10	185	125	90
P3K11	185	125	90
P3K12	185	125	90
P3K13	185	125	90
P3K14	185	125	90
P3K16	205	150	115
P3K17	205	150	115
P3K18	265	175	140
P3K19	265	175	140
P3K20	265	175	140
P3K21	265	175	140
P3K22	265	175	140
P3K23	290	190	170
P3K24	290	190	170
P3K25	290	190	170
P3K26	290	190	170
P3K27	345	230	200
P3K28	345	230	200
P3K29	345	230	200
P3K30	345	230	200